

8" Low-Profile Anti-Entrapment Suction Outlet Cover and Sump with Adjustable Collar

VGB Series

Product Specification Sheet

The AquaStar line of suction outlet covers, compliant with the new Virginia Graeme-Baker Pool and Spa Safety Act (ASME/ANSI A112.19.8a-2008)

Features

For single or multiple drain use
(see installation instructions)

Single

Floor: 100 GPM at 4.2 fps
Wall: 70 GPM at 2.9 fps

Dual

Floor: 100 GPM at 2.1 fps
Wall: 70 GPM at 1.5 fps

Triple system

Floor: 200 GPM at 2.8 fps
Wall: 140 GPM at 1.9 fps
Floor/wall: 108 GPM at 1.5 fps

7.7 square inch opening

Meets or exceeds NSF 50/ASME/ANSI A112.19.8a-2008 national standards and ASTM G154 UV testing

Two extra 1" knock-out ports

Adjustable collar aids in leveling drain cover to pool finish

#316 stainless steel screws

Includes 2" threaded plug and 2" x 1½" reducer bushing S/S

USPC-listed with IAPMO R&T

8 per case



Model # LP8SBACxxx




Part Numbers / Colors

- LP8SBAC101 White
- LP8SBAC102 Black
- LP8SBAC103 Lt. Gray
- LP8SBAC104 Blue
- LP8SBAC105 Dk. Gray
- LP8SBAC106 Bone
- LP8SBAC107 Taupe
- LP8SBAC108 Tan

Also available without cover
p/n 8SBNOACxxx 8/case

Also available without sump with
cover and adjustable collar only
p/n LP8AVACxxx 50/case

VGB 2008 Compliant

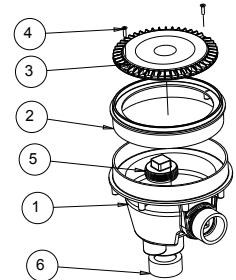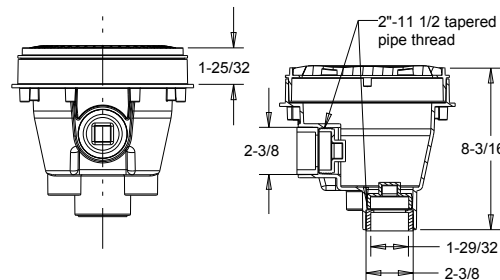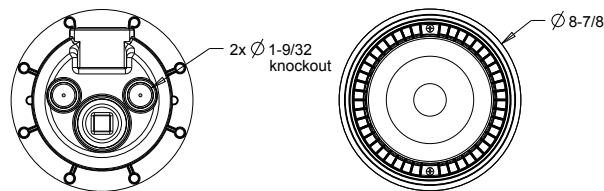

1. 8" sump bucket for adjustable collar
2. 8" sump bucket adjustable ring
3. 8" low profile anti-entrapment cover
4. #10 flat head phillips screw
5. 2" tapered pipe thread plug
6. 2" soc. x 1½" soc. pipe reducer